

H07RN-F

TITANEX, the Nexans H07RN-F is a flexible cable, elastomer insulated and sheathed cable with a copper core.

STANDARDS

Product 2014/68/EU; EN 50525-2-21; HD 516; IEC 60245-4 type 66; NF C32-102-4

International EU Directive 2011/65/EU (RoHS)

ADVANTAGES

- Very high flexibility
- Very high crush resistance
- Good resistance to chemicals, oils and vibrations

TITANEX® H07RN-F cables with EPR rubber insulation and rubber sheathing offer outstanding mechanical properties to meet your most varied requirements. No matter what the installation conditions are, whether indoors or outdoors, in cramped and hazardous environments or in the presence of oils and chemicals, TITANEX combines strength and flexibility to meet all your requirements.

For more than 50 years the TITANEX® cables have been recognized and are the guarantee of reliable installations in industrial environments (factories, construction sites, ports, ...) whether they are fixed or mobile such as for cranes, machines tool connections, motor power supplies The mechanical qualities of TITANEX cables also make them suitable for use in event environments, such as festivals, concerts and sport events, where the cable is exposed without protection and can be used several times.

- Core temperature : 90°C
- Operating Voltage : 450/750V mobile, 0.6/1kV fixed. TITANEX H07RN-F cables have been designed to limit the generation and spread of fire and smoke.
- Reaction to fire : Eca (according to EN 50575:2014+A1:2016)
- Flame retardant (IEC 60332-1, C2)



CONTACT

Building Products Information
contact.fr@nexans.com



Mechanical resistance to impacts
AG3



Cable flexibility
Flexible



Chemical resistance
Accidental



Water proof
Good



Max. conductor temp. in service
90 °C



Oil resistance
Yes



Operating temp.
-25 ... 55 °C



RoHS compliant
Yes

INSTALLATION

TITANEX H07RN-F cables can be laid in cable trays, on shelves, inside ducts or fixed to walls, outside with or without protection. They can also be immersed with additional mechanical protection. Additionally, they can also be installed outdoors without protection (UV resistance).

Minimum bending radius

- Dynamic : 6 to 8 x outer diameter of the cable.
- Static : 3 x outer diameter of the cable if OD < or = 12mm ; 4x if OD > 12mm.

Laying cable conductors

When pulling the cable, all conductors must be equally stressed. The tensile force must never exceed 15N/mm² of total cross-sections.

The maximum tensile force should never exceed 1000N in total, although the above rule may lead to higher values for large cross-sections.

MARKING

TITANEX 90°C n (x or G) s NEXANS CE «har» USE H07RN-F - factory n° Made in France Y Eca n°DoP

Metric marking

Marking every metre, so that only the required length is unwound.

CHARACTERISTICS

Construction characteristics

Conductor material	Bare copper
Insulation	Special cross-linked elastomer
Outer sheath	Special cross-linked elastomer
Sheath colour	Black
Conductor shape	Circular

Dimensional characteristics

Average sheath thickness	- mm
--------------------------	------

Mechanical characteristics

Mechanical resistance to impacts	AG3
Cable flexibility	Flexible

Usage characteristics

Silicone free	Yes
Chemical resistance	Accidental
Water proof	Good
Max. conductor temperature in service	90 °C
Oil resistance	Yes
Operating temperature, range	-25 ... 55 °C
RoHS compliant	Yes
Short-circuit max. conductor temperature	250 °C

SINGLE CORE

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickn ess [mm]	Max. outer diam. [mm]	Approx weight [kg/km]	Chemical resistanc e	Flame retard ant	Lea d free	Min. dynamic operating bending rad. [mm]	Nexans Ref.	Name
No	1.5	24	23.3	0.8	7.1	50	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	42.6	10055628	Nexans H07RN-F TITANEX 1x1.5
No	2.5	33	14.0	0.9	7.9	66	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	47.4	10275535	Nexans H07RN-F TITANEX 1x2.5
No	4	45	8.7	1.0	9.0	94	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	54.0	10055632	Nexans H07RN-F TITANEX 1x4
No	6	58	5.9	1.0	9.8	109	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	58.8	10055634	Nexans H07RN-F TITANEX 1x6
No	10	80	3.4	1.2	11.9	182	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	71.4	10055580	Nexans H07RN-F TITANEX 1x10
No	16	107	2.2	1.2	13.4	256	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	80.4	10055582	Nexans H07RN-F TITANEX 1x16
No	25	138	1.4	1.4	15.8	369	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	94.8	10055584	Nexans H07RN-F TITANEX 1x25
No	25	138	1.4	1.4	15.8	369	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	94.8	10273076	Nexans TITANEX 1X25 MBH R50

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickn ess [mm]	Max. outer diam. [mm]	Approx weight [kg/km]	Chemical resistanc e	Flame retard ant	Lead free	Min. dynamic operating bending rad. [mm]	Nexans Ref.	Name
No	35	169	1.04	1.4	17.9	482	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	107.4	10055586	Nexans H07RN-F TITANEX 1x35
No	35	169	1.04	1.4	17.9	482	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	107.4	10273077	Nexans TITANEX 1X35 MBH R50
No	50	207	0.75	1.6	20.6	662	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	123.6	10055588	Nexans H07RN-F TITANEX 1x50
No	50	207	0.75	1.6	20.6	662	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	123.6	10273078	Nexans TITANEX 1X50 MBH R50
No	70	268	0.56	1.6	23.3	895	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	139.8	10055590	Nexans H07RN-F TITANEX 1x70
No	95	328	0.44	1.8	26.0	1144	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	-	10055591	Nexans H07RN-F TITANEX 1x95
No	120	382	0.36	1.8	28.6	1430	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	171.6	10055592	Nexans H07RN-F TITANEX 1x120
No	150	441	0.31	2.0	31.4	1740	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	188.4	10055593	Nexans H07RN-F TITANEX 1x150

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickn ess [mm]	Max. outer diam. [mm]	Approx weight [kg/km]	Chemical resistanc e	Flame retard ant	Lead free	Min. dynamic operating bending rad. [mm]	Nexans Ref.	Name
No	185	506	0.28	2.2	34.4	2160	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	206.4	10055635	Nexans H07RN-F TITANEX 1x185
No	240	599	0.23	2.4	38.3	2730	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	229.8	10055636	Nexans H07RN-F TITANEX 1x240
No	300	693	0.2	2.6	41.9	3480	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	251.4	10055637	Nexans H07RN-F TITANEX 1x300
No	400	825	0.18	2.8	46.8	4510	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	280.8	10055958	Nexans H07RN-F TITANEX 1x400
No	500	946	0.16	3.0	52.0	5700	Accidental	C2, NF C 32-070 & IEC 60332- 1	Yes	312.0	10055962	Nexans H07RN-F TITANEX 1x500

TWO CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	1	20	39.4	0.8	7.7	10.0	99	Accidental	10055641	Nexans H07RN-F TITANEX 2x1
No	1.5	26	27.0	0.8	8.5	11.0	111	Accidental	10055509	Nexans H07RN-F TITANEX 2x1.5
No	2.5	36	16.2	0.9	10.2	13.2	161	Accidental	10055514	Nexans H07RN-F TITANEX 2x2,5

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	4	49	10.1	1.0	11.8	15.1	238	Accidental	10055517	Nexans H07RN-F TITANEX 2x4
No	6	63	6.7	1.0	13.1	16.8	279	Accidental	10055519	Nexans H07RN-F TITANEX 2x6
No	10	86	3.8	1.2	17.7	22.6	538	Accidental	10055642	Nexans H07RN-F TITANEX 2x10
No	16	115	2.5	1.2	20.2	25.7	744	Accidental	10055643	Nexans H07RN-F TITANEX 2x16
No	25	149	1.68	1.4	24.3	30.7	1074	Accidental	10055675	Nexans H07RN-F TITANEX 2x25

THREE CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
No	1.5	23	27.0	0.8	9.2	11.9	134	10055674	Nexans H07RN-F TITANEX 3x1.5
No	2.5	31	16.2	0.9	10.9	14.0	195	10055505	Nexans H07RN-F TITANEX 3x2.5
Yes	1	20	39.4	0.8	8.3	10.7	117	10055624	Nexans H07RN-F TITANEX 3G1
Yes	1.5	26	27.0	0.8	9.2	11.9	134	10055523	Nexans H07RN-F TITANEX 3G1.5
Yes	2.5	36	16.2	0.9	10.9	14.0	195	10055530	Nexans H07RN-F TITANEX 3G2.5
Yes	4	49	10.1	1.0	12.7	16.2	290	10055535	Nexans H07RN-F TITANEX 3G4

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	6	63	7.0	1.0	14.1	18.0	346	10055537	Nexans H07RN-F TITANEX 3G6
Yes	10	86	4.0	1.2	19.1	24.2	663	10055645	Nexans H07RN-F TITANEX 3G10
Yes	16	115	2.5	1.2	21.8	27.6	924	10055621	Nexans H07RN-F TITANEX 3G16
Yes	25	149	1.7	1.4	26.1	33.0	1345	10055646	Nexans H07RN-F TITANEX 3G25
Yes	35	185	1.21	1.4	29.3	37.1	1760	10055647	Nexans H07RN-F TITANEX 3G35
Yes	50	225	0.87	1.6	34.1	42.9	2390	10055648	Nexans H07RN-F TITANEX 3G50
Yes	70	289	0.64	1.6	38.4	48.3	3110	10055649	Nexans H07RN-F TITANEX 3G70
Yes	95	352	0.5	1.8	43.3	54.0	4170	10055672	Nexans H07RN-F TITANEX 3G95
Yes	120	410	0.4	1.8	47.4	60.0	5080	10056078	Nexans H07RN-F TITANEX 3G120
Yes	150	473	0.35	2.0	52.0	66.0	6220	10056497	Nexans H07RN-F TITANEX 3G150
Yes	185	542	0.3	2.2	57.0	72.0	7730	10055934	Nexans H07RN-F TITANEX 3G185

FOUR CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickness [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	1	18	34.08	0.8	9.6	12.0	144	10055652	Nexans H07RN-F TITANEX 4G1
Yes	1.5	23	23.3	0.8	10.2	13.1	165	10055541	Nexans H07RN-F TITANEX 4G1.5
Yes	2.5	31	14.0	0.9	12.5	15.5	245	10055547	Nexans H07RN-F TITANEX 4G2.5
Yes	4	42	8.71	1.0	14.0	18.0	357	10055551	Nexans H07RN-F TITANEX 4G4
Yes	6	54	5.84	1.0	15.7	20.0	443	10055574	Nexans H07RN-F TITANEX 4G6
Yes	10	75	3.42	1.2	20.8	26.5	818	10055555	Nexans H07RN-F TITANEX 4G10
Yes	16	100	2.2	1.2	23.8	30.1	1150	10055558	Nexans H07RN-F TITANEX 4G16
Yes	25	127	1.44	1.4	28.9	36.6	1700	10055594	Nexans H07RN-F TITANEX 4G25
Yes	35	158	1.04	1.4	32.5	41.1	2180	10055573	Nexans H07RN-F TITANEX 4G35
Yes	50	192	0.75	1.6	37.7	47.5	3030	10055560	Nexans H07RN-F TITANEX 4G50
Yes	70	246	0.56	1.6	42.7	54.0	3990	10055653	Nexans H07RN-F TITANEX 4G70
Yes	95	298	0.44	1.8	48.4	61.0	5360	10055620	Nexans H07RN-F TITANEX 4G95
Yes	120	346	0.36	1.8	53.0	66.0	6500	10055676	Nexans H07RN-F TITANEX 4G120

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	150	395	0.31	2.0	58.0	73.0	7990	10055983	Nexans H07RN-F TITANEX 4G150
Yes	185	450	0.28	2.2	64.0	80.0	9910	10055952	Nexans H07RN-F TITANEX 4G185
Yes	240	538	0.23	2.4	72.0	91.0	13120	10056547	Nexans H07RN-F TITANEX 4G240

FIVE CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	1	18	34.1	0.8	10.9	14.0	180	10055656	Nexans H07RN-F TITANEX 5G1
Yes	1.5	23	23.6	0.8	11.2	14.4	238	10055564	Nexans H07RN-F TITANEX 5G1.5
Yes	2.5	31	14.0	0.9	13.3	17.0	297	10055571	Nexans H07RN-F TITANEX 5G2.5
Yes	4	42	8.72	1.0	15.6	19.9	453	10055597	Nexans H07RN-F TITANEX 5G4
Yes	6	54	5.84	1.0	17.5	22.2	557	10055600	Nexans H07RN-F TITANEX 5G6
Yes	6	54	5.84	1.0	17.5	22.2	557	10276125	Nexans TITANEX 5G6 MBH R50
Yes	10	75	3.43	1.2	22.9	29.1	1001	10055602	Nexans H07RN-F TITANEX 5G10
Yes	16	100	2.2	1.2	26.4	33.3	1430	10055605	Nexans H07RN-F TITANEX 5G16

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickness [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	16	100	2.2	1.2	26.4	33.3	1430	10273849	Nexans TITANEX 5G16 MBH D500
Yes	16	100	2.2	1.2	26.4	33.3	1430	10273850	Nexans TITANEX 5G16 MBH D1000
Yes	25	127	1.44	1.4	32.0	40.4	2096	10055627	Nexans H07RN-F TITANEX 5G25
Yes	35	158	1.04	1.4	35.6	45.1	2690	10055506	Nexans H07RN-F TITANEX 5G35
Yes	50	192	1.04	1.6	41.8	53.0	3840	10055799	Nexans H07RN-F TITANEX 5G50
Yes	70	246	0.56	1.6	47.5	60.0	4996	10055800	Nexans H07RN-F TITANEX 5G70
Yes	95	298	0.44	1.8	54.0	67.0	6640	10055801	Nexans H07RN-F TITANEX 5G95
Yes	150	395	0.31	2.0	66.0	83.0	9960	10058444	Nexans H07RN-F TITANEX 5G150

SEVEN CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickness [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	1.5	17	23.3	0.8	14.7	18.7	349	10055577	Nexans H07RN-F TITANEX 7G1.5
Yes	2.5	21	13.9	0.9	17.1	21.8	487	10055609	Nexans H07RN-F TITANEX 7G2.5

TWELVE CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	1.5	12	23.3	0.8	17.6	22.14	510	10055611	Nexans H07RN-F TITANEX 12G1.5
Yes	2.5	16	13.9	0.9	20.6	26.2	702	10055614	Nexans H07RN-F TITANEX 12G2.5
Yes	4	6	8.7	1.0	27.3	34.5	1025	10056024	Nexans H07RN-F TITANEX 12G4

EIGHTEEN CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	1.5	10	20.7	0.8	20.7	26.3	730	10056293	Nexans H07RN-F TITANEX 18G1.5
Yes	2.5	14	13.9	0.9	24.4	30.9	1018	10056295	Nexans H07RN-F TITANEX 18G2.5

TWENTY FOUR CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Max. outer diam. [mm]	Min. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	1.5	9	-	0.8	30.7	24.3	1000	10055828	Nexans H07RN-F TITANEX 24G1.5
Yes	2.5	12	23.3	0.9	36.4	28.8	1406	10055878	Nexans H07RN-F TITANEX 24G2,5

THIRTY SIX CORES

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thicknes s [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
Yes	1.5	7	23.3	0.8	27.8	35.2	1325	10056294	Nexans H07RN-F TITANEX 36G1.5
Yes	2.5	9	13.9	0.9	33.2	41.8	1879	10056296	Nexans H07RN-F TITANEX 36G2.5

SINGLE CORE DUPLICATA

Green/ Yellow core	Cross sectio n [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	1.5	24	23.3	0.8	5.7	7.1	50	Accidental	10055628	Nexans H07RN-F TITANEX 1x1.5
No	2.5	33	14.0	0.9	6.3	7.9	66	Accidental	10275535	Nexans H07RN-F TITANEX 1x2.5
No	4	45	8.7	1.0	7.2	9.0	94	Accidental	10055632	Nexans H07RN-F TITANEX 1x4
No	6	58	5.9	1.0	7.9	9.8	109	Accidental	10055634	Nexans H07RN-F TITANEX 1x6
No	10	80	3.4	1.2	9.5	11.9	182	Accidental	10055580	Nexans H07RN-F TITANEX 1x10
No	16	107	2.2	1.2	10.8	13.4	256	Accidental	10055582	Nexans H07RN-F TITANEX 1x16
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	10055584	Nexans H07RN-F TITANEX 1x25
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	10273076	Nexans TITANEX 1X25 MBH R50

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	10055586	Nexans H07RN-F TITANEX 1x35
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	10273077	Nexans TITANEX 1X35 MBH R50
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	10055588	Nexans H07RN-F TITANEX 1x50
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	10273078	Nexans TITANEX 1X50 MBH R50
No	70	268	0.56	1.6	18.6	23.3	895	Accidental	10055590	Nexans H07RN-F TITANEX 1x70
No	95	328	0.44	1.8	20.8	26.0	1144	Accidental	10055591	Nexans H07RN-F TITANEX 1x95
No	120	382	0.36	1.8	22.8	28.6	1430	Accidental	10055592	Nexans H07RN-F TITANEX 1x120
No	150	441	0.31	2.0	25.2	31.4	1740	Accidental	10055593	Nexans H07RN-F TITANEX 1x150
No	185	506	0.28	2.2	27.6	34.4	2160	Accidental	10055635	Nexans H07RN-F TITANEX 1x185
No	240	599	0.23	2.4	30.6	38.3	2730	Accidental	10055636	Nexans H07RN-F TITANEX 1x240
No	300	693	0.2	2.6	33.5	41.9	3480	Accidental	10055637	Nexans H07RN-F TITANEX 1x300
No	400	825	0.18	2.8	37.4	46.8	4510	Accidental	10055958	Nexans H07RN-F TITANEX 1x400

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	500	946	0.16	3.0	41.3	52.0	5700	Accidental	10055962	Nexans H07RN-F TITANEX 1x500

SINGLE CORE DUPLICATA

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	1.5	24	23.3	0.8	5.7	7.1	50	Accidental	10055628	Nexans H07RN-F TITANEX 1x1.5
No	2.5	33	14.0	0.9	6.3	7.9	66	Accidental	10275535	Nexans H07RN-F TITANEX 1x2.5
No	4	45	8.7	1.0	7.2	9.0	94	Accidental	10055632	Nexans H07RN-F TITANEX 1x4
No	6	58	5.9	1.0	7.9	9.8	109	Accidental	10055634	Nexans H07RN-F TITANEX 1x6
No	10	80	3.4	1.2	9.5	11.9	182	Accidental	10055580	Nexans H07RN-F TITANEX 1x10
No	16	107	2.2	1.2	10.8	13.4	256	Accidental	10055582	Nexans H07RN-F TITANEX 1x16
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	10055584	Nexans H07RN-F TITANEX 1x25
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	10273076	Nexans TITANEX 1X25 MBH R50
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	10055586	Nexans H07RN-F TITANEX 1x35

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	10273077	Nexans TITANEX 1X35 MBH R50
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	10055588	Nexans H07RN-F TITANEX 1x50
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	10273078	Nexans TITANEX 1X50 MBH R50
No	70	268	0.56	1.6	18.6	23.3	895	Accidental	10055590	Nexans H07RN-F TITANEX 1x70
No	95	328	0.44	1.8	20.8	26.0	1144	Accidental	10055591	Nexans H07RN-F TITANEX 1x95
No	120	382	0.36	1.8	22.8	28.6	1430	Accidental	10055592	Nexans H07RN-F TITANEX 1x120
No	150	441	0.31	2.0	25.2	31.4	1740	Accidental	10055593	Nexans H07RN-F TITANEX 1x150
No	185	506	0.28	2.2	27.6	34.4	2160	Accidental	10055635	Nexans H07RN-F TITANEX 1x185
No	240	599	0.23	2.4	30.6	38.3	2730	Accidental	10055636	Nexans H07RN-F TITANEX 1x240
No	300	693	0.2	2.6	33.5	41.9	3480	Accidental	10055637	Nexans H07RN-F TITANEX 1x300
No	400	825	0.18	2.8	37.4	46.8	4510	Accidental	10055958	Nexans H07RN-F TITANEX 1x400
No	500	946	0.16	3.0	41.3	52.0	5700	Accidental	10055962	Nexans H07RN-F TITANEX 1x500

SINGLE CORE DUPLICATA

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	1.5	24	23.3	0.8	5.7	7.1	50	Accidental	10055628	Nexans H07RN-F TITANEX 1x1.5
No	2.5	33	14.0	0.9	6.3	7.9	66	Accidental	10275535	Nexans H07RN-F TITANEX 1x2.5
No	4	45	8.7	1.0	7.2	9.0	94	Accidental	10055632	Nexans H07RN-F TITANEX 1x4
No	6	58	5.9	1.0	7.9	9.8	109	Accidental	10055634	Nexans H07RN-F TITANEX 1x6
No	10	80	3.4	1.2	9.5	11.9	182	Accidental	10055580	Nexans H07RN-F TITANEX 1x10
No	16	107	2.2	1.2	10.8	13.4	256	Accidental	10055582	Nexans H07RN-F TITANEX 1x16
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	10055584	Nexans H07RN-F TITANEX 1x25
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	10273076	Nexans TITANEX 1X25 MBH R50
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	10055586	Nexans H07RN-F TITANEX 1x35
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	10273077	Nexans TITANEX 1X35 MBH R50
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	10055588	Nexans H07RN-F TITANEX 1x50
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	10273078	Nexans TITANEX 1X50 MBH R50

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Nexans Ref.	Name
No	70	268	0.56	1.6	18.6	23.3	895	Accidental	10055590	Nexans H07RN-F TITANEX 1x70
No	95	328	0.44	1.8	20.8	26.0	1144	Accidental	10055591	Nexans H07RN-F TITANEX 1x95
No	120	382	0.36	1.8	22.8	28.6	1430	Accidental	10055592	Nexans H07RN-F TITANEX 1x120
No	150	441	0.31	2.0	25.2	31.4	1740	Accidental	10055593	Nexans H07RN-F TITANEX 1x150
No	185	506	0.28	2.2	27.6	34.4	2160	Accidental	10055635	Nexans H07RN-F TITANEX 1x185
No	240	599	0.23	2.4	30.6	38.3	2730	Accidental	10055636	Nexans H07RN-F TITANEX 1x240
No	300	693	0.2	2.6	33.5	41.9	3480	Accidental	10055637	Nexans H07RN-F TITANEX 1x300
No	400	825	0.18	2.8	37.4	46.8	4510	Accidental	10055958	Nexans H07RN-F TITANEX 1x400
No	500	946	0.16	3.0	41.3	52.0	5700	Accidental	10055962	Nexans H07RN-F TITANEX 1x500

SINGLE CORE DUPLICATA

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickne ss [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Chemical resistance	Flame retarda nt	Nexans Ref.	Name
No	1.5	24	23.3	0.8	5.7	7.1	50	Accidental	C2, NF C 32-070 & IEC 60332-1	10055628	Nexans H07RN-F TITANEX 1x1.5

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickn ess [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx . weight [kg/km]	Chemical resistanc e	Flame retarda nt	Nexans Ref.	Name
No	2.5	33	14.0	0.9	6.3	7.9	66	Accidental	C2, NF C 32-070 & IEC 60332-1	10275535	Nexans H07RN-F TITANEX 1x2.5
No	4	45	8.7	1.0	7.2	9.0	94	Accidental	C2, NF C 32-070 & IEC 60332-1	10055632	Nexans H07RN-F TITANEX 1x4
No	6	58	5.9	1.0	7.9	9.8	109	Accidental	C2, NF C 32-070 & IEC 60332-1	10055634	Nexans H07RN-F TITANEX 1x6
No	10	80	3.4	1.2	9.5	11.9	182	Accidental	C2, NF C 32-070 & IEC 60332-1	10055580	Nexans H07RN-F TITANEX 1x10
No	16	107	2.2	1.2	10.8	13.4	256	Accidental	C2, NF C 32-070 & IEC 60332-1	10055582	Nexans H07RN-F TITANEX 1x16
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	C2, NF C 32-070 & IEC 60332-1	10055584	Nexans H07RN-F TITANEX 1x25
No	25	138	1.4	1.4	12.7	15.8	369	Accidental	C2, NF C 32-070 & IEC 60332-1	10273076	Nexans TITANEX 1X25 MBH R50
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	C2, NF C 32-070 & IEC 60332-1	10055586	Nexans H07RN-F TITANEX 1x35
No	35	169	1.04	1.4	14.3	17.9	482	Accidental	C2, NF C 32-070 & IEC 60332-1	10273077	Nexans TITANEX 1X35 MBH R50
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	C2, NF C 32-070 & IEC 60332-1	10055588	Nexans H07RN-F TITANEX 1x50

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickn ess [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx . weight [kg/km]	Chemical resistanc e	Flame retarda nt	Nexans Ref.	Name
No	50	207	0.75	1.6	16.5	20.6	662	Accidental	C2, NF C 32-070 & IEC 60332-1	10273078	Nexans TITANEX 1X50 MBH R50
No	70	268	0.56	1.6	18.6	23.3	895	Accidental	C2, NF C 32-070 & IEC 60332-1	10055590	Nexans H07RN-F TITANEX 1x70
No	95	328	0.44	1.8	20.8	26.0	1144	Accidental	C2, NF C 32-070 & IEC 60332-1	10055591	Nexans H07RN-F TITANEX 1x95
No	120	382	0.36	1.8	22.8	28.6	1430	Accidental	C2, NF C 32-070 & IEC 60332-1	10055592	Nexans H07RN-F TITANEX 1x120
No	150	441	0.31	2.0	25.2	31.4	1740	Accidental	C2, NF C 32-070 & IEC 60332-1	10055593	Nexans H07RN-F TITANEX 1x150
No	185	506	0.28	2.2	27.6	34.4	2160	Accidental	C2, NF C 32-070 & IEC 60332-1	10055635	Nexans H07RN-F TITANEX 1x185
No	240	599	0.23	2.4	30.6	38.3	2730	Accidental	C2, NF C 32-070 & IEC 60332-1	10055636	Nexans H07RN-F TITANEX 1x240
No	300	693	0.2	2.6	33.5	41.9	3480	Accidental	C2, NF C 32-070 & IEC 60332-1	10055637	Nexans H07RN-F TITANEX 1x300
No	400	825	0.18	2.8	37.4	46.8	4510	Accidental	C2, NF C 32-070 & IEC 60332-1	10055958	Nexans H07RN-F TITANEX 1x400
No	500	946	0.16	3.0	41.3	52.0	5700	Accidental	C2, NF C 32-070 & IEC 60332-1	10055962	Nexans H07RN-F TITANEX 1x500

TWO CORES DUPLICATA

Green/ Yellow core	Cross section [mm ²]	Perm. current rating open air [A]	Voltage drop, single phase [V/A.km]	Av. insul. thickness [mm]	Min. outer diam. [mm]	Max. outer diam. [mm]	Approx. weight [kg/km]	Nexans Ref.	Name
No	1	20	39.4	0.8	7.7	10.0	99	10055641	Nexans H07RN-F TITANEX 2x1
No	1.5	26	27.0	0.8	8.5	11.0	111	10055509	Nexans H07RN-F TITANEX 2x1.5
No	2.5	36	16.2	0.9	10.2	13.2	161	10055514	Nexans H07RN-F TITANEX 2x2,5
No	4	49	10.1	1.0	11.8	15.1	238	10055517	Nexans H07RN-F TITANEX 2x4
No	6	63	6.7	1.0	13.1	16.8	279	10055519	Nexans H07RN-F TITANEX 2x6
No	10	86	3.8	1.2	17.7	22.6	538	10055642	Nexans H07RN-F TITANEX 2x10
No	16	115	2.5	1.2	20.2	25.7	744	10055643	Nexans H07RN-F TITANEX 2x16
No	25	149	1.68	1.4	24.3	30.7	1074	10055675	Nexans H07RN-F TITANEX 2x25

ADDITIONAL INFORMATIONS NEXANS TITANEX

Core identification

(In accordance with european harmonization HD308 S2)

- 1x: black
- 2x: brown - blue
- 3x: brown - black - grey (brown - black - blue if the conductor cross-section is 1.5 or 2.5mm²)
- 3G: brown - blue - green/yellow
- 4x: brown - black - grey - blue
- 4G: brown - black - grey - green/yellow
- 5x: black cores with printed numbers
- 5G: blue - brown - black - grey - green/yellow
- 7 cores and above : black cores with printed numbers

Current rating capacities

The data are indicated for continuous duty operation and apply to:

- Maximum conductor temperature = 90 °C
- Nominal frequencies = 50 or 60 Hz
- One cable in free air (on perforated trays)
- Ambient temperature = 30 °C

Data recording from IEC 60364-5-52 or NF C 15-100

Voltage drop

The data are based on $\cos \varphi = 0.8$

Minimum bending radius

- Static use: 3 x cable outer diameter
- Dynamic use: 6 to 8 x outer cable diameter.

NEXANS TITANEX, MADE TO SURVIVE

Nexans TITANEX

Tough as nails since 1953



Withstands the most extreme situations




Highly flexible




Durable marking



Up to 1kV and 90°C maximum temperature for protected fixed installations.

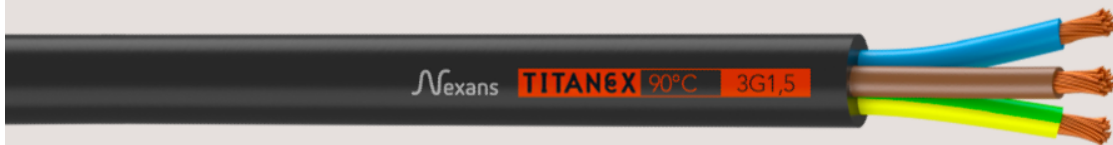

NEXANS TITANEX FEATURES

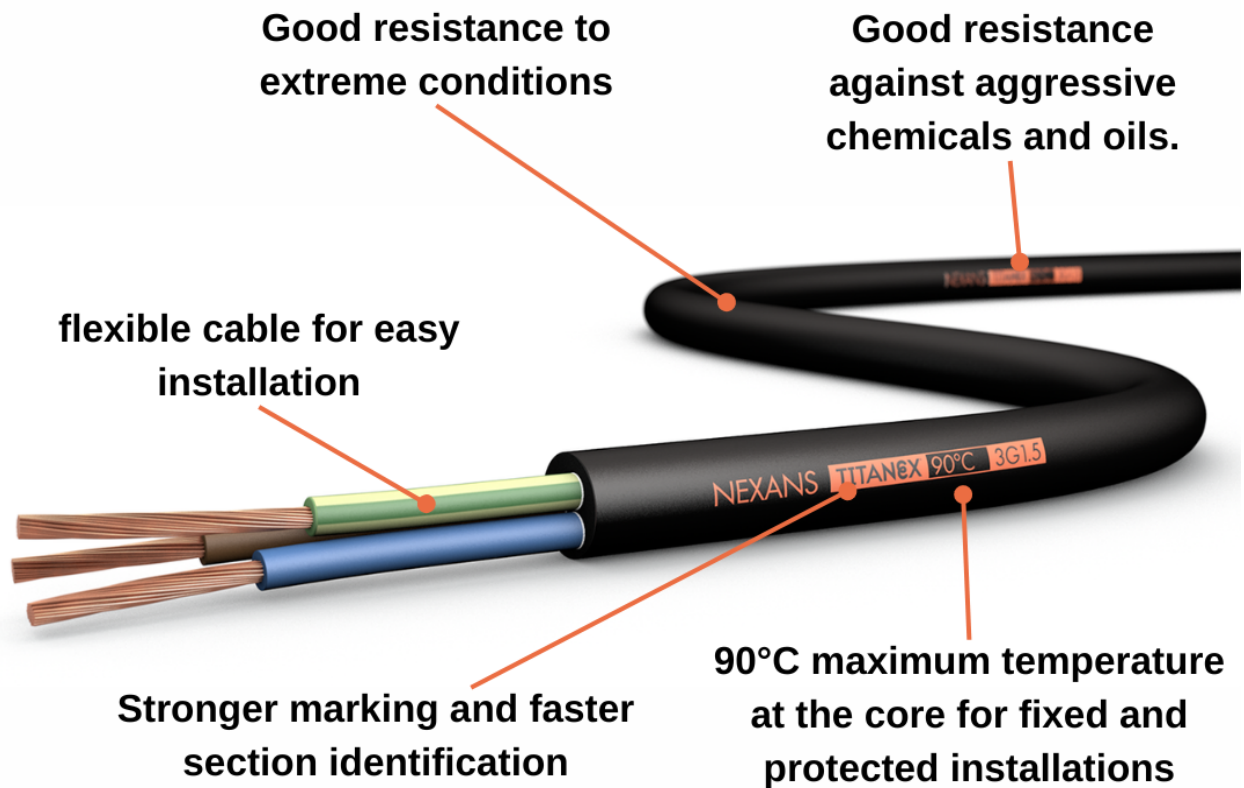

TITANEX